


LM-95 OR DETAIL SEALANT PW APPLIED TO CUT EDGE AND TERMINATIONS OF 650 MEMBRANE

12" STRIP OF DETAIL TAPE APPLIED TO INSIDE AND OUTSIDE CORNERS - PREPARE SUBSTRATE WITH 650 LT LIQUID ADHESIVE, CALIFORNIA SEALANT OR SHURTAC LIQUID ADHESIVE AT A RATE OF 250 - 300 SQ. FT. PER GALLON

3/4" FILLET OF DETAIL SEALANT PW OR LM-95 APPLIED TO INSIDE CORNERS VERTICALLY AND HORIZONTALLY TO RAW CONCRETE - ALLOW DETAIL SEALANT PW TO CURE FOR 2 HOURS PRIOR TO SHEET APPLICATION

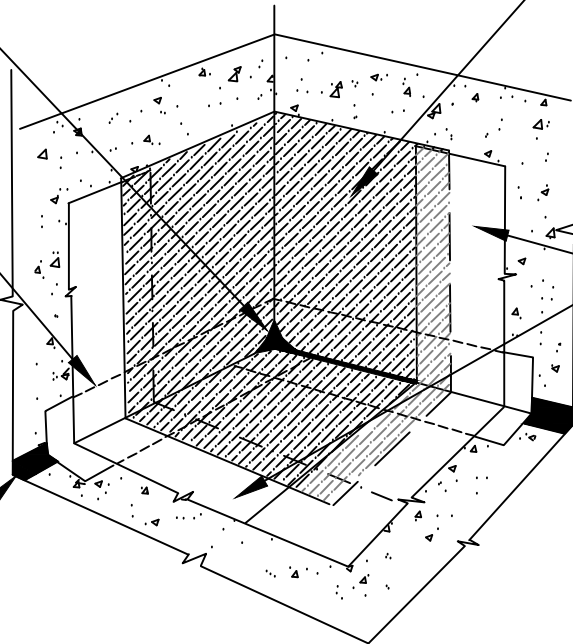

PIECE OF 650 MEMBRANE CUT AND FIT TO CORNER - APPLIED OVER CONCRETE PREPARED WITH 650 LT LIQUID ADHESIVE, CALIFORNIA SEALANT OR SHURTAC AT A RATE OF 250 -300 SQ. FT. PER GALLON

650 MEMBRANE APPLIED OVER CONCRETE PREPARED WITH 650 LT LIQUID ADHESIVE, CALIFORNIA SEALANT OR SHURTAC AT A RATE OF 250 -300 SQ. FT. PER GALLON

## WP13 SECTION @ FIELD FORMED SELF ADHERED INSIDE CORNER

**SPECIAL NOTE: IF ADHESIVE IS REQUIRED FOR SEAMS OR ENDLAPS DO NOT USE SHURTAC LIQUID ADHESIVE**

© POLYGUARD PRODUCTS, INC.  
MATERIALS SEPARATED FOR CLARITY

The information provided is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all data sheets, statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us.	NOT TO SCALE
	EFFECTIVE DATE: 07/17/14
	SUPERCEDES: 05/15/14