


LM-95 LIQUID MEMBRANE OR
DETAIL SEALANT PW APPLIED TO
CUT EDGE AND TERMINATIONS
OF PRM

12" STRIP OF DETAIL TAPE APPLIED TO
INSIDE AND OUTSIDE CORNERS -
PREPARE SUBSTRATE WITH 650 LT
LIQUID ADHESIVE, CALIFORNIA SEALANT
OR SHUR-TAC LIQUID ADHESIVE AT A
RATE OF 250 - 300 SQ. FT. PER GALLON

3/4" FILLET OF DETAIL SEALANT PW
OR LM-95 LIQUID MEMBRANE
APPLIED TO INSIDE CORNERS
VERTICALLY AND HORIZONTALLY TO
RAW CONCRETE - ALLOW DETAIL
SEALANT PW TO CURE FOR 2 HOURS
PRIOR TO SHEET APPLICATION

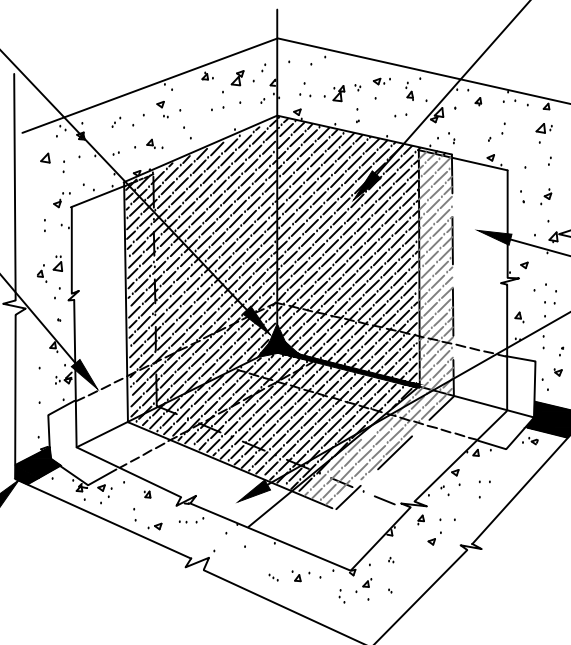

PIECE OF PRM CUT AND FIT TO
CORNER - APPLIED OVER
CONCRETE PREPARED WITH 650
LT LIQUID ADHESIVE, CALIFORNIA
SEALANT OR SHUR-TAC AT A RATE
OF 250 -300 SQ. FT. PER GALLON

PRM APPLIED OVER CONCRETE
PREPARED WITH 650 LT LIQUID
ADHESIVE, CALIFORNIA SEALANT
OR SHUR-TAC AT A RATE OF 250
-300 SQ. FT. PER GALLON

PRM13

SECTION @ FIELD FORMED SELF ADHERED INSIDE CORNER

**SPECIAL NOTE: IF ADHESIVE IS REQUIRED
FOR SEAMS OR ENDLAPS DO NOT USE
SHUR-TAC LIQUID ADHESIVE**

© POLYGUARD PRODUCTS, INC.
MATERIALS SEPARATED FOR CLARITY