

BACKER ROD AND SEALANT - BY OTHERS

MINIMUM 90 MILS OF DETAIL SEALANT PW OR LM-95 APPLIED TO CLEAN, DRY, AND FROST FREE CONCRETE AND THE TOP EDGE OF THE TERMINATION STRIP, OVER EACH FASTENER HEAD AND ONTO 1" OF FABRIC BELOW THE TERMINATION STRIP

FASTENERS SPACED 2" INWARD FROM EACH END OF TERMINATION STRIP AND NOT MORE THAN 8" SPACING BETWEEN FASTENERS


1/8" X 1" METAL TERMINATION STRIP ALIGNED ALONG THE TOP EDGE OF UNDERSLAB MEMBRANE AND 606 TAPE

606 TAPE APPLIED TO CLEAN, DRY, AND FROST FREE CONCRETE PREPARED WITH 650 LT LIQUID ADHESIVE OR CALIFORNIA SEALANT APPLIED AT A RATE OF 250 - 300 SQ. FT PER GALLON

CONCRETE POUR

UNDERSLAB MEMBRANE WITH FABRIC TOWARD CONCRETE POUR

APPROVED SUBSTRATE

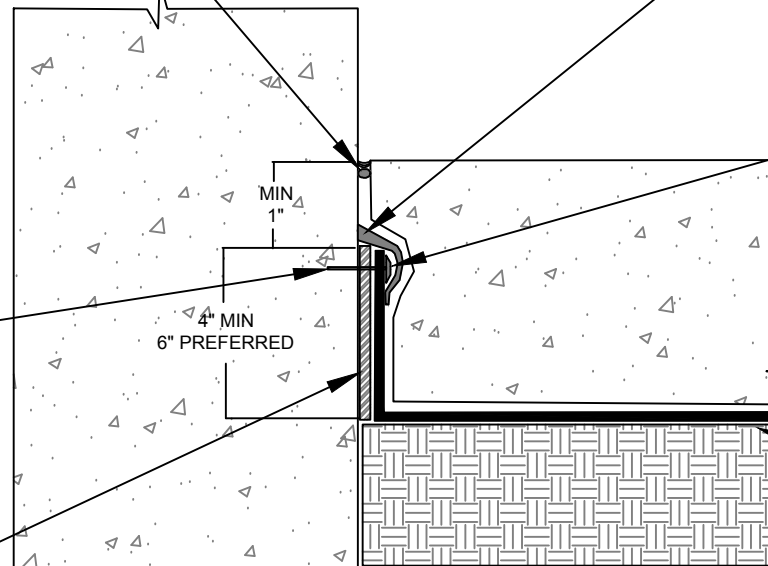

SECTION @ UNDERSLAB MEMBRANE TERMINATION TO EXISTING CONCRETE WALL

US5

Polyguard Products, Inc.
 P.O. Box 755 - Ennis, TX 75119
 Phone: 214-515-5000 Fax: 972-875-9425
 Web Site - www.polyguard.com

© POLYGUARD PRODUCTS, INC.
 MATERIALS SEPARATED FOR CLARITY

The information provided is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all data sheets, statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us.	NOT TO SCALE
	EFFECTIVE DATE: 03/18/14
	SUPERCEDES: 03/16/12